



ThermaReach-VFR User Guide



Technical Specifications

The **ThermaReach-VFR** is a versatile control unit housed securely within an **IP67 enclosure**, offering LoRaWAN® compatible switching of **dry (volt-free) supplies**. Commonly, this device is used to control heating valves for PAYG, boiler signals, and similar HVAC or building management applications requiring isolated switching.

This device operates in **LoRaWAN® compatible Class C**, features **FUOTA** (Firmware Upgrades Over the Air), and includes built-in overheating protection. To conform to safety requirements, the device is wired using **0.75mm² 3-core flex cable** for power and a **two-core YY control cable** for the output, and the entire circuit must be safeguarded by a **5A fuse**.



Technical Data

Feature	Specification
Device Type	LoRaWAN® compatible Dry Switch
LoRaWAN® Device Class	Class C End-device
Frequency Range	868 MHz (UK/EU Standard)
Power Supply (IN)	100-240VAC 50/60Hz / 24-30VDC
Switching Capacity	Volt-Free Contact (0V to 240VAC / 0V to 30VDC)
Internal Relay Rating	16(8)A AC / 10A DC
Maximum System Load	5A (Limited by mandatory 5A protective fuse)
Cabling (Input)	0.75mm ² 3-Core Flex (Power Supply)
Cabling (Output)	0.75mm ² 2-Core YY Control Cable (Switched Output)
Protection Rating	IP67
Dimensions	118mm × 82mm × 66mm
Compliance	CE (LVD, RED, EMC), RoHS, WEEE

Safety Instructions & Legal Notices

Critical Safety Requirement:

This device **MUST** be protected with a 5A Fused Connection Unit (FCU)

Volt-Free Notice:

Output terminals are electrically isolated; no voltage is provided by the device to the output terminals.

Professional Installation:

This device must be installed by a qualified professional in accordance with **BS 7671**.


Isolation:

Isolate all power sources before opening the enclosure or handling wiring.

Installation & Wiring

Wiring Configuration

The ThermaReach-VFR uses 0.75mm² 3-core flex cable for Power INPUT and YY control cable for the switched output.

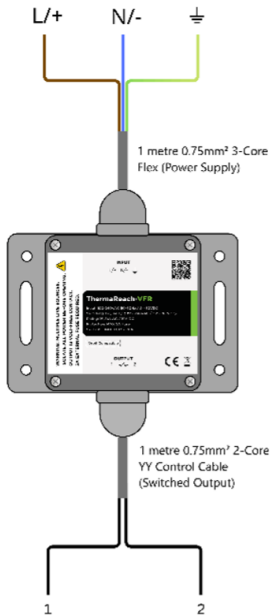

Input (Power Supply)

Connect your supply cable to the terminals marked INPUT at the top of your device:

- L / + : Live (AC) or Positive (DC).
- N / - : Neutral (AC) or Negative (DC).
- \perp : Earth.
- Supply Range: 100-240VAC 50/60Hz or 24-30VDC.

Output (Switching)

Use the 2-core YY control cable for the switched output. Connect to terminals 1 and 2. As a volt-free contact, it can switch logic signals (0V), low voltage (24V), or mains voltage (240V).

Enclosure Sealing

To maintain the IP67 protection rating of the housing, you must ensure the IP68 glands are tightened securely around the cable jackets. This ensures the watertight integrity of the enclosure for industrial or outdoor applications.

Commissioning & LoRaWAN[®] Behaviour

Network Provisioning

Open your LoRaWAN[®] Network provider access panel and add the device using the supplied **Serial Number**, **DevEUI**, **AppEUI (JoinEUI)**, and **AppKey**. These details are provided on your delivery note from Sycous Limited.

Start-up Behaviour

Once powered, the device will attempt to Join the LoRaWAN network for up to 10 minutes.

- **Deep Retry Mode:** After 20 failed join attempts, the device enters a 'deep retry' mode to comply with LoRaWAN duty-cycle regulations.
- **Intervals:** In this mode, the interval between join attempts may increase significantly (e.g., to ~3 hours and 15 minutes) to avoid flooding the radio spectrum.
- **FUOTA:** This device features Firmware Upgrades Over the Air (FUOTA) for future-proofing and security.

Regulatory Compliance & Disposal

Compliance

- **CE:** Low Voltage Directive (2014/35/EU); Radio Equipment Directive (2014/53/EU); EMC Directive (2014/30/EU).

Disposal (WEEE)

The symbol below indicates that this product must not be disposed of with household waste. It must be disposed of at an authorized collection point for the recycling of waste electrical and electronic equipment (WEEE).

Manufacturer

Sycous Limited,
New York House, 1 Harper St, Leeds LS2 7EA
<https://sycous.com/>

Want to know more?

Contact our team on **+44 (0) 113 3604 776** or
email **info@sycous.com**.

Visit **sycous.com** to learn more about our
innovative metering, remote data collection and
billing solutions.



Sycous Limited is registered in
England and Wales.
Company Number 08836039.
Registered Address: New York
House, 1 Harper Street, Leeds,
LS2 7EA